
WaterPro

# WATER PRESSURE TANK

## WPWT Series



# **WPWT** Series

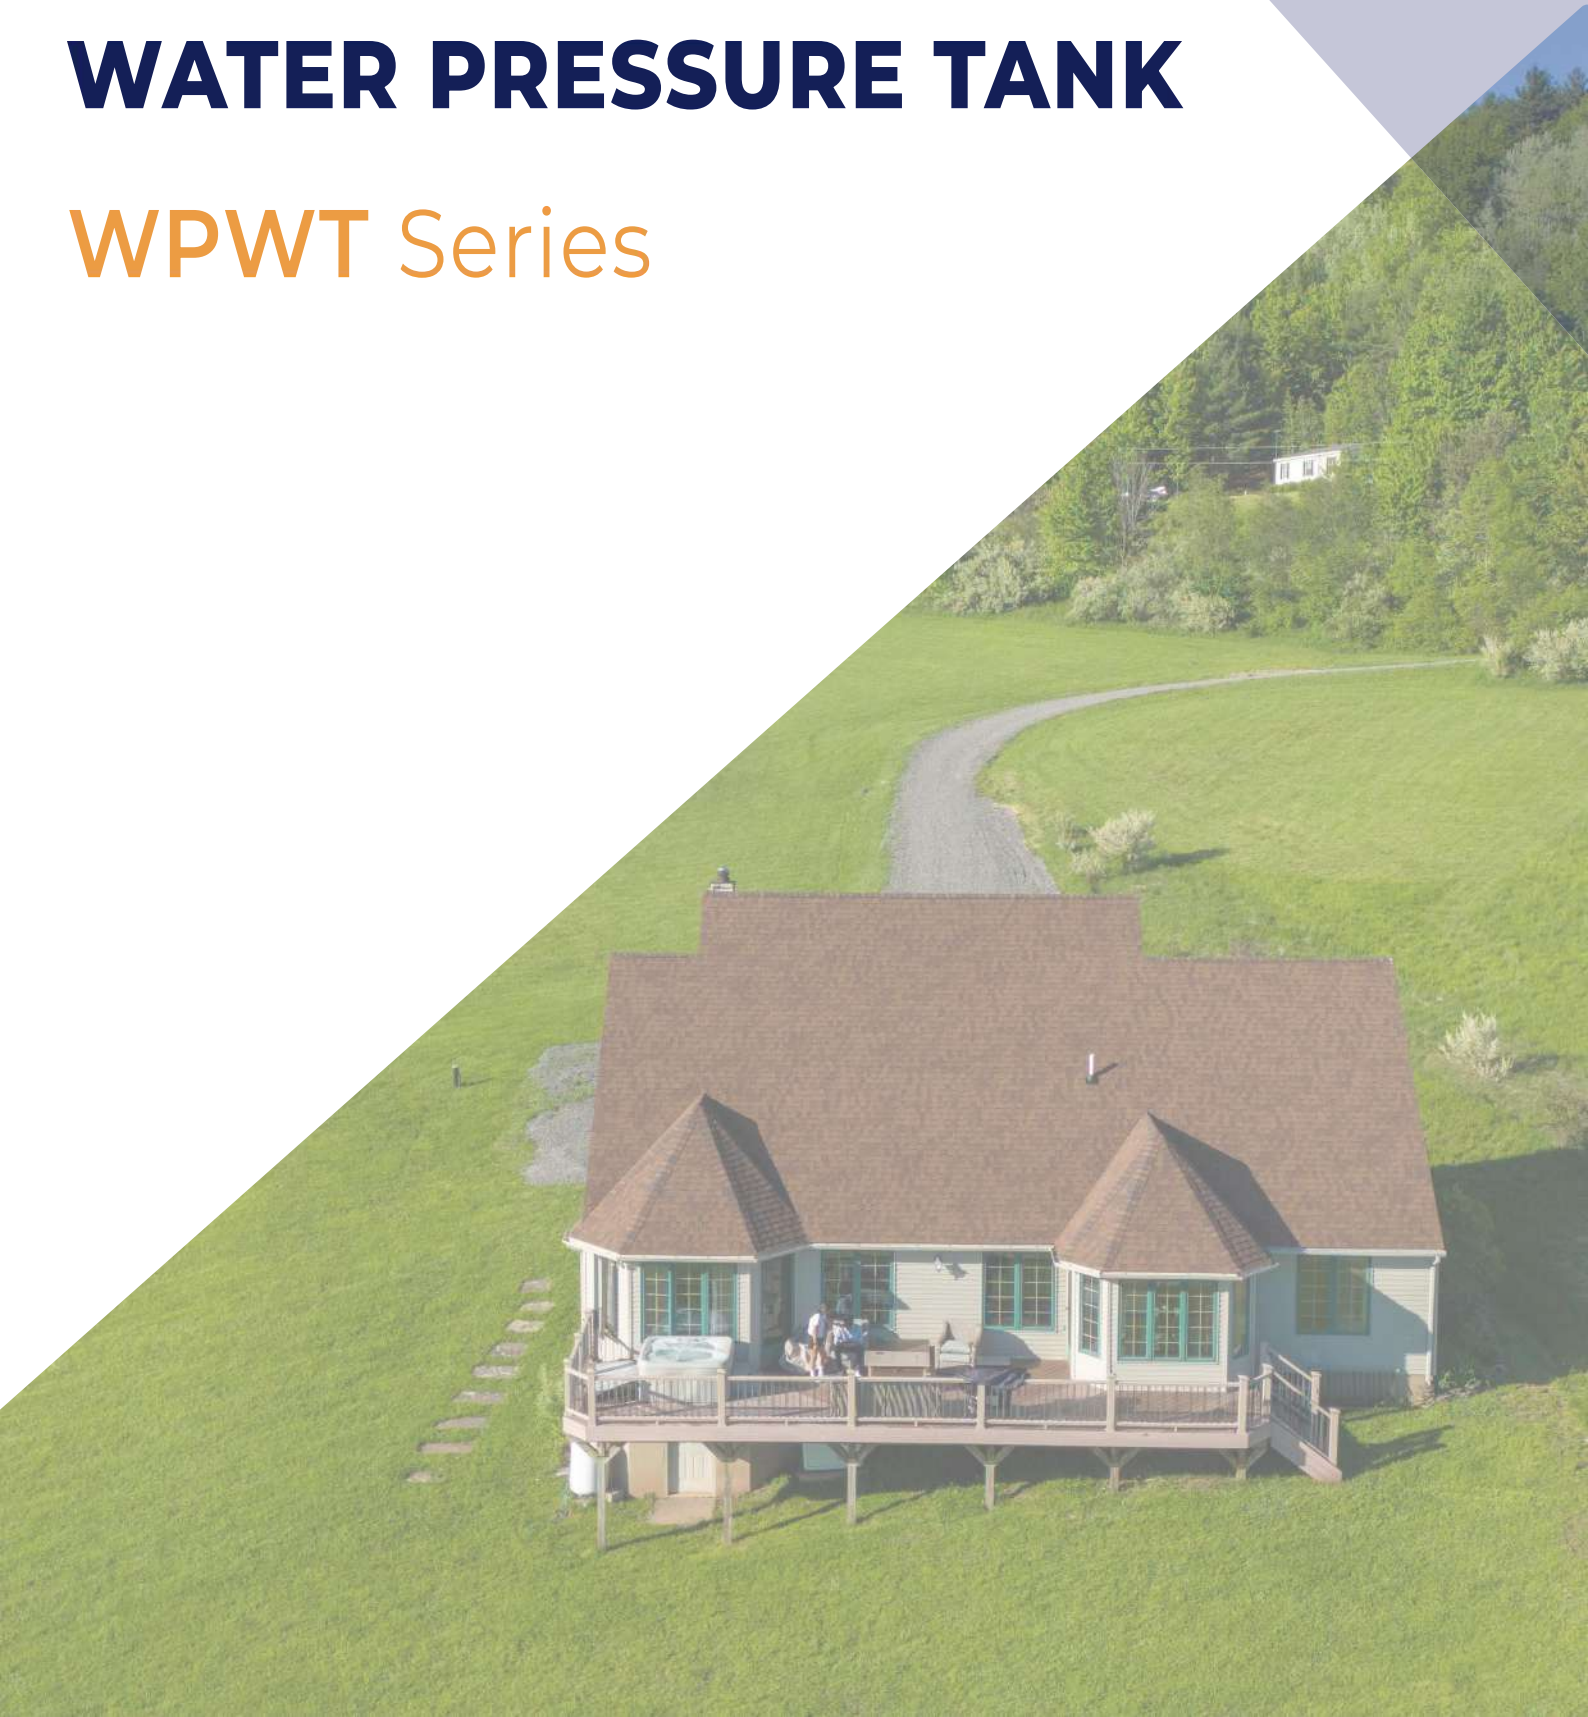


WATERPRO presure tank consists of fixed diaphragm pressure tanks that are known by WPWT series of tanks. By combining unique and innovative design features, our pressure tank represent the best choice on the market for a wide variety of applications, including booster systems, boiler systems and thermal expansion and irrigation systems


1: Double O-ring sealed, leak free air valve cap design
2: High Pressure proof diaphragm design
3: Adhesion-strength tested powder coating finish
4: Stainless Steel connector
5: Thick Carbon Steel tank body




# WPWT Series

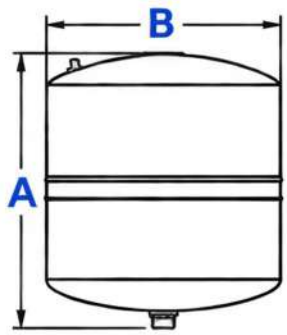

24L

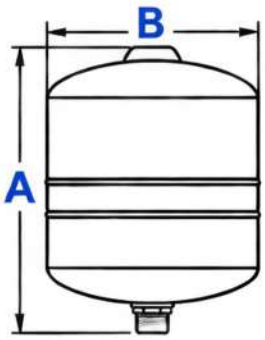

35L



60L, 100L

| Model | Connection (Inch) | Nominal Volume | | Dimensions (mm) | | |
|---|---|---|---|---|---|---|
| | | Liters | Gallons | A | B | C |
| WPWT-24L | 1" BSPT | 24 | 6.34 | 440 | 290 | - |
| WPWT-35L | 1" BSPT | 35 | 9.25 | 480 | 318 | - |
| WPWT-60L | 1" BSPT | 60 | 15.85 | 623 | 387 | 67 |
| WPWT-100L | 1" BSPT | 100 | 26.42 | 810 | 428 | 66 |

## SPECIFICATIONS


| | | |
|---|---|---|
| Tank Shell Material | | Thick Carbon Steel |
| Nominal Volumes | | 24-100L/6.34-26.42gl |
| Membrane | | Butyl |
| Min. Operating Temperature | | -10° C/14°F |
| Max. Operating Temperature | Fixed | 90°C/194°F |
| | Replaceable | 100°C/212°F |
| Max. Working Pressure | Fixed | 10 bar \| 150 psi |
| | Replaceable | 8-10 bar \| 120-150 psi |
| Test Pressure | Fixed | 14.3 bar \| 215 psi |
| | Replaceable | 10 bar \| 150 psi |
| Factory Pre-charge | Fixed | 1.9 bar \| 28 psi |
| | Replaceable | 1.5-2.5 bar \| 22.5-37.5 psi |

Made of FDA compliant materials **EXTRA SAFE**

Industry leading tank wall thickness **EXTRA STRONG**

Pioneering antibacterial diaphragm technology **EXTRA CLEAN**

# OUR NATIONAL PRESENCE

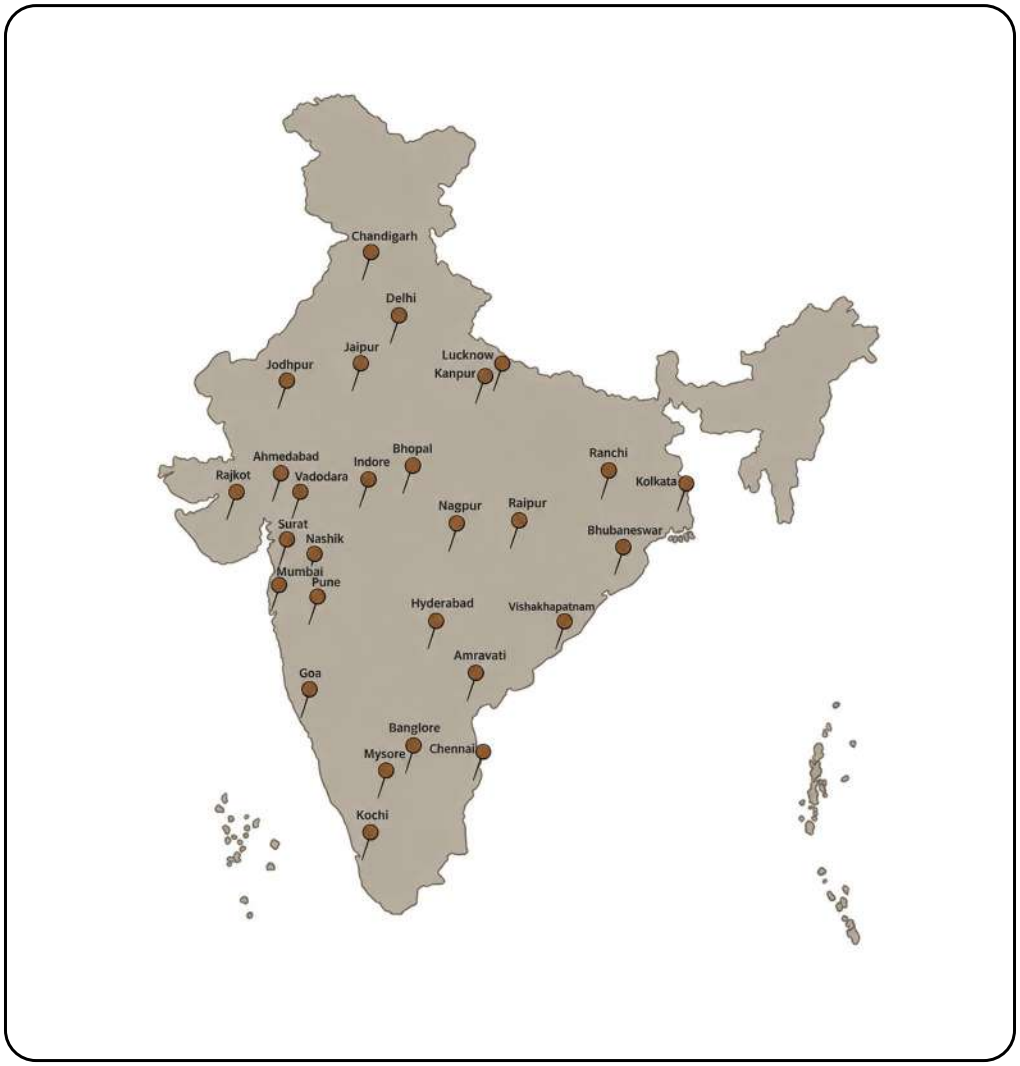



Hiten Patel
+91 9825277037
waterprotanks@gmail.com

**Address:**
Ahmedabad, Gujarat, India,
380001